

# Experimental demonstration of deflection angle tuning in diffraction-inspired unidirectional structures

Rodriguez-Ulibarri, P.; Pacheco-Peña, V.; Falcone, F.; Navarro-Cia, Miguel; Serebryannikov, A. E.; Beruete, M.

DOI:

[10.1109/USNC-URSI.2015.7303335](https://doi.org/10.1109/USNC-URSI.2015.7303335)

License:

Other (please specify with Rights Statement)

*Document Version*

Peer reviewed version

*Citation for published version (Harvard):*

Rodriguez-Ulibarri, P, Pacheco-Peña, V, Falcone, F, Navarro-Cia, M, Serebryannikov, AE & Beruete, M 2015, Experimental demonstration of deflection angle tuning in diffraction-inspired unidirectional structures. in *Radio Science Meeting (Joint with AP-S Symposium), 2015 USNC-URSI*. Institute of Electrical and Electronics Engineers (IEEE), pp. 51. <https://doi.org/10.1109/USNC-URSI.2015.7303335>

[Link to publication on Research at Birmingham portal](#)

## **Publisher Rights Statement:**

(c) 2015 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other users, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted components of this work in other works

## **General rights**

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.

## **Take down policy**

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact [UBIRA@lists.bham.ac.uk](mailto:UBIRA@lists.bham.ac.uk) providing details and we will remove access to the work immediately and investigate.

## Experimental Demonstration of Deflection Angle Tuning in Diffraction-Inspired Unidirectional Structures

P. Rodríguez-Ulibarri<sup>(1)</sup>, V. Pacheco-Peña<sup>(1)</sup>, F. Falcone<sup>(1)</sup>, M. Navarro-Cía\*<sup>(2)</sup>,  
A. E. Serebryannikov<sup>(3)</sup>, M. Beruete<sup>(1)</sup>

(1) Universidad Pública de Navarra, Pamplona 31006, Spain

(2) Imperial College London, London SW7 2AZ, United Kingdom

(3) Adam Mickiewicz University, Poznań 61-614, Poland

Direction selective transmission regimes obtainable in the framework of the Lorentz reciprocity have lately attracted scientist community attention. Unlike nonreciprocal structures, reciprocal ones are eminently passive and generally much simpler. Enabling direction selective regimes with reciprocal structures requires breaking the spatial inversion symmetry. With this aim in view, different strategies have been proposed, such as higher diffraction orders excitation, polarization conversion, and bending transmission channels in prism-like configurations. Here, the first approach is implemented for a fishnet metamaterial loaded with a dielectric grating. It is shown that a very compact volumetric device can be designed while maintaining direction selectivity features.

Direction selectivity is experimentally demonstrated here at the V-band of the millimeter-wave range. Beyond this, tuning and eventually sign-switching of the output deflection angle is obtained by varying the frequency and/or angle of incidence. To this end, an ABmm<sup>TM</sup> vector network analyzer has been used together with a turning platform and a rotating positioner for monitoring both incidence and deflection angle. Forward (grating side illumination) and backward (non-grating side illumination) transmission results at 65 GHz and different output deflection angles ( $\theta_{out} = -10, -5, 0, 5$  and  $10$  deg) are shown in Fig. 1. A clear forward-to-backward transmission contrast can be noticed. At the same time, tuning of the output deflection angle is achieved by sweeping the incidence angle.

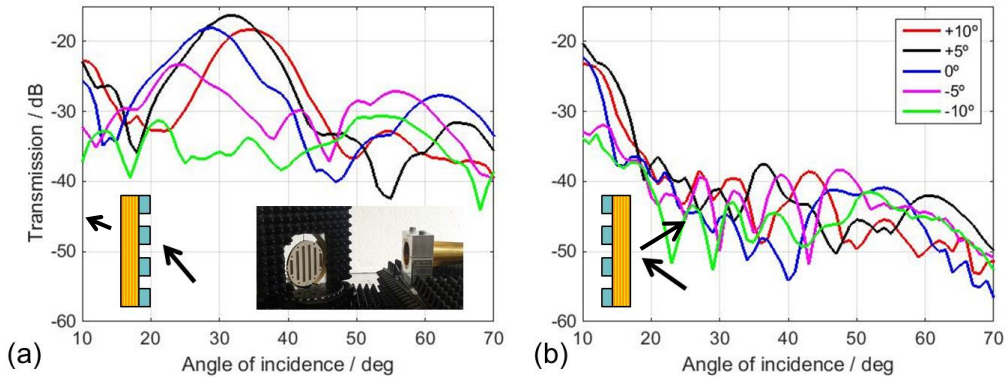


Fig. 1. (a) Forward Transmission at 65 GHz versus angle of incidence. Insets: Schematic of forward transmission scenario and picture of transmitter antenna and sample. (b) Backward Transmission at 65 GHz versus angle of incidence. Insets: Schematic of backward transmission scenario.